



LINE SEIKI

WATER PROOF DIGITAL THERMOMETER

TC-330WP

Best for various applications, from Food Control (HACCP) to industrial applications, can be used even on wet condition environments with the Waterproof (IP65) protection. Equipped with Hold, Max/Min functions.




TC-330WP

(Probe sold separately)

- IP65 Protection” or “IP65 Front Panel Protection
- Type K Thermocouple Probe (Sold separately)
- Multi-Function

● Functions

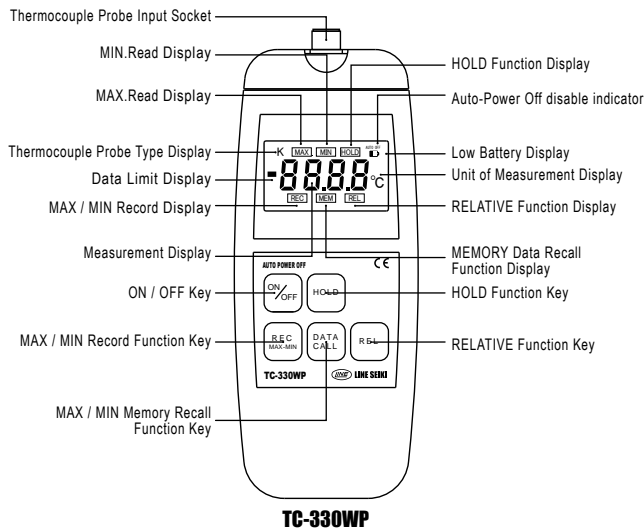

(Note) * Thermocouple probes are not included to TC-330WP.

● Probe(Sold separately)

Resolution	Tip Shape	Cable	Sensor Type	Material	Protection Pipe
300°C	Slanted	Straight L=1000mm	K Type	SUS304	Pipe Type
300°C	Slanted	Straight L=1000mm	K Type	SUS304	Pipe Type
600°C	Pointed	Straight L=1000mm	K Type	SUS316	Sheath Type
700°C	Spherical	Straight L=1000mm	K Type	SUS316	Sheath Type
800°C	Pointed	Straight L=1000mm	K Type	SUS316	Sheath Type

● General Specifications

Model	TC-330WP	Display K Sensor Type ----- Burn-Out Low Battery AUTO OFF Auto-Power Off disable Data Hold Relative Measurement Max/Min Data Recording MAX/MIN Max/Min Data Memory Recorded Memory Data
Probe Input	1	
Sensor Type	Thermocouple K	
Measurig	K : -160 ~ 1372°C	
Resolution	199.9°C and below: 0.1°C 200°C and above: 1°C	
Accuracy (at 25°C ± 5°C)	0~199.9°C : +0.1% of reading + 0.7°C -0.1°C or less: +0.2% of reading + 1°C 200°C above: +0.2% of reading + 1°C	
Temperature	±0.015% of reading + 0.06°C / °C	
Measuring	Approx. 1.2 sec. /reading	
Linearize	Digital Linearize	
Function	Auto-Power Off, Data Hold, Data	
Operating Temp.	0 ~ 50°C	
Operating	0 ~ 90%RH at 0 ~ 35°C	
Power Supply	006P (9V) Battery	
Battery Life	Approx. 500 Hours	
Dimensions / Weight	166(H) x 68(W) x 35(D)mm, 210g	
Input Connection	Waterproofing Connector	
Protection	IP65 (IEC60529)	
Accesories	Instruction Manual , One battery 006P (9V)	



LINE SEIKI CO., LTD.

This catalogue was last revised as of April 26, 2011.
 *Specifications Subject to Change Without Notice
 All Rights Reserved, Copyright©2011, LINE SEIKI CO., LTD.
 Printed in Japan

Address: 37-7 Chuo-cho, 2-Chome Meguro-ku, Tokyo 152-0001 Japan
 Contact : Tel: +81-3-37165151 Fax: +81-3-37104552
 E-mail : webtrade@line.co.jp Web: http://www.lineseiki.com